

Recommended PCB Layout

ELECTRICAL:

CURRENT RATING: 1.5 AMP

CONTACT RESISTANCE:

30 Milliohm Max.

INSULATOR RESISTANCE:

> 1000M W Min.

DIELECTRIC WITHSTANDING VOLTAGE:

500 VAC / Minute

OPERATING TEMPERATURE: -55° C to +85° C

VOLTAGE: 30V AC/DC


MATERIAL:

INSULATOR: Thermoplastic UL94V-0 (PBT)

CONTACTS: Copper Alloy

SHELL: Nickel Plated Brass

HOW TO ORDER:

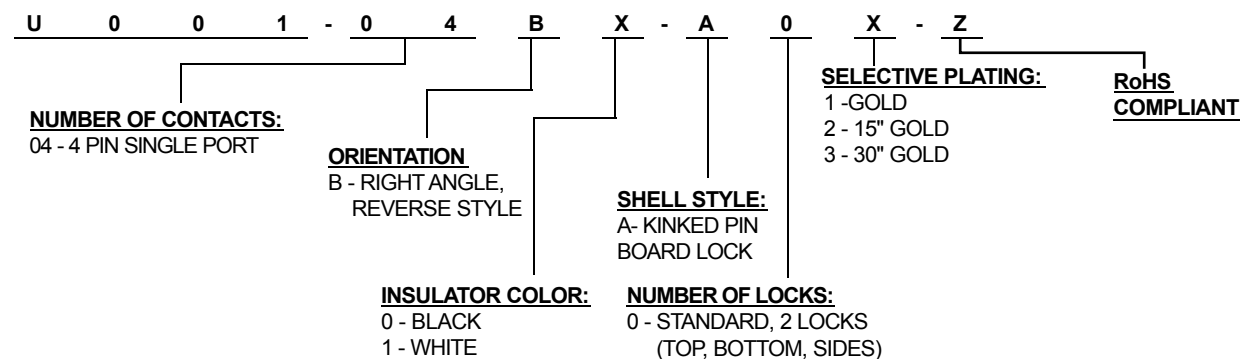

Rev	Drawn	Checked	Approved	Date
0	B.S.	S.M.	S.M.	06/26/10

SMP TECHNOLOGY, INC.

USB CONNECTOR, SINGLE PORT, RIGHT ANGLE, A TYPE,
THRU HOLE; REVERSE ORIENTATION