


ELECTRICAL:

CURRENT RATING: 1A
 CONTACT RESISTANCE:
 < 30 Milliohm Max.
 INSULATION RESISTANCE:
 > 1000 Mgeaohm Min.
 DIELECTRIC WITHSTANDING VOLTAGE:
 750V (rms) AC for 1 Minute
 OPERATING TEMPERATURE: -55° C to +125° C
 CAPACITANCE: 2pF Max.

MATERIAL:

INSULATOR: Thermoplastic UL94V-0
 CONTACTS: Phosphor Bronze
 CONTACT PLATING:
 Gold Plating over Nickel on Contact Area,
 Tin Plating on Terminal
 SHELL: Copper Alloy
 SHELL PLATING: Nickel Over Copper Alloy

HOW TO ORDER:

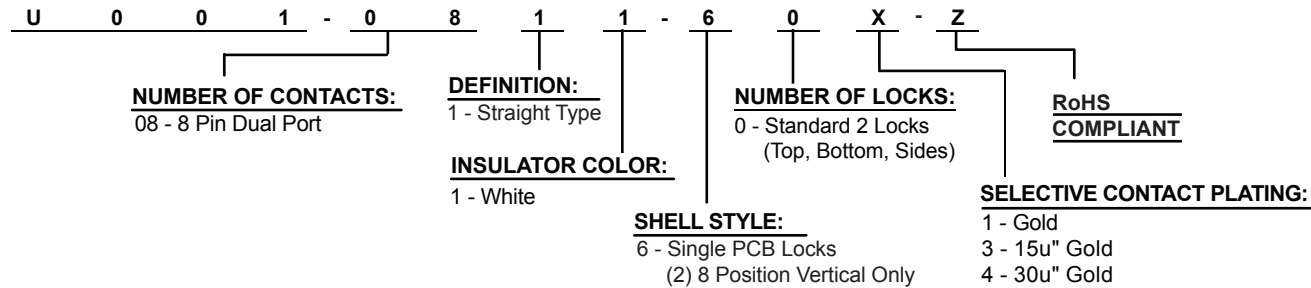

Rev					Apv.	Date
0	Issued				WHS	5/30/06
SCALE	MAT'L		FINISH			
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/-	ANGLE +/-	UNIT: mm	

SMP TECHNOLOGY, INC.

USB Connector, A Type, 8 Position, Vertical, PCB Mount
 Single PCB Lock

SERIES: U 0 0 1 - 0 8 1 1 - 6 0 X - Z

Pg: 1