


ELECTRICAL:

CURRENT RATING: 1A
 CONTACT RESISTANCE:
 < 30 Milliohm Max.
 INSULATION RESISTANCE:
 > 1000 Mgeaohm Min.
 DIELECTRIC WITHSTANDING VOLTAGE:
 500V (rms) AC for 1 Minute
 OPERATING TEMPERATURE: -25° C to +85° C

MATERIAL:

INSULATOR: Thermoplastic 30% Glass Filled, UL94V0
 Blue (Pantone 300C)
 CONTACTS: Phosphor Bronze
 CONTACT PLATING:
 Selective Gold Plating over Nickel on Contact Area,
 Tin Plating on Terminal
 SHELL: Copper Alloy
 SHELL PLATING: Nickel

HOW TO ORDER:

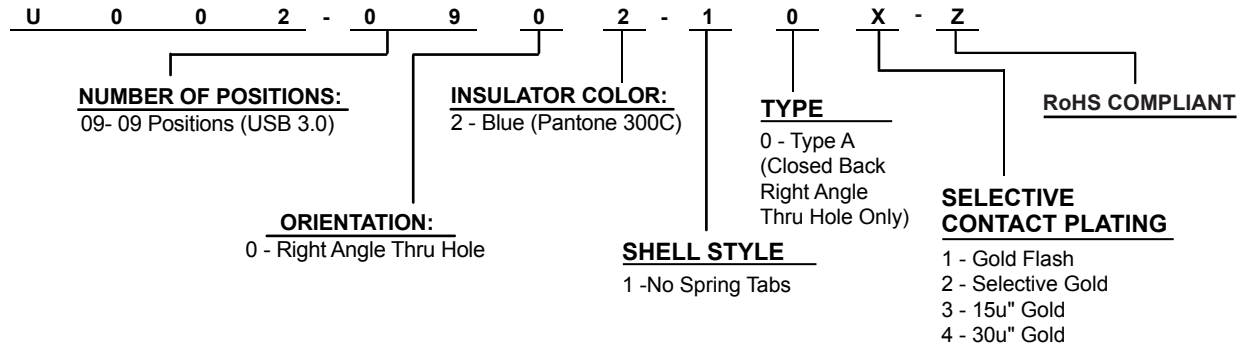

Rev	Drawn	Checked	Approved	Date
0	B.S.	S.M.	S.M.	09/23/10

SMP TECHNOLOGY, INC.

USB 3.0 Connector, A Type, Female, 9 Position, Blue Insulator