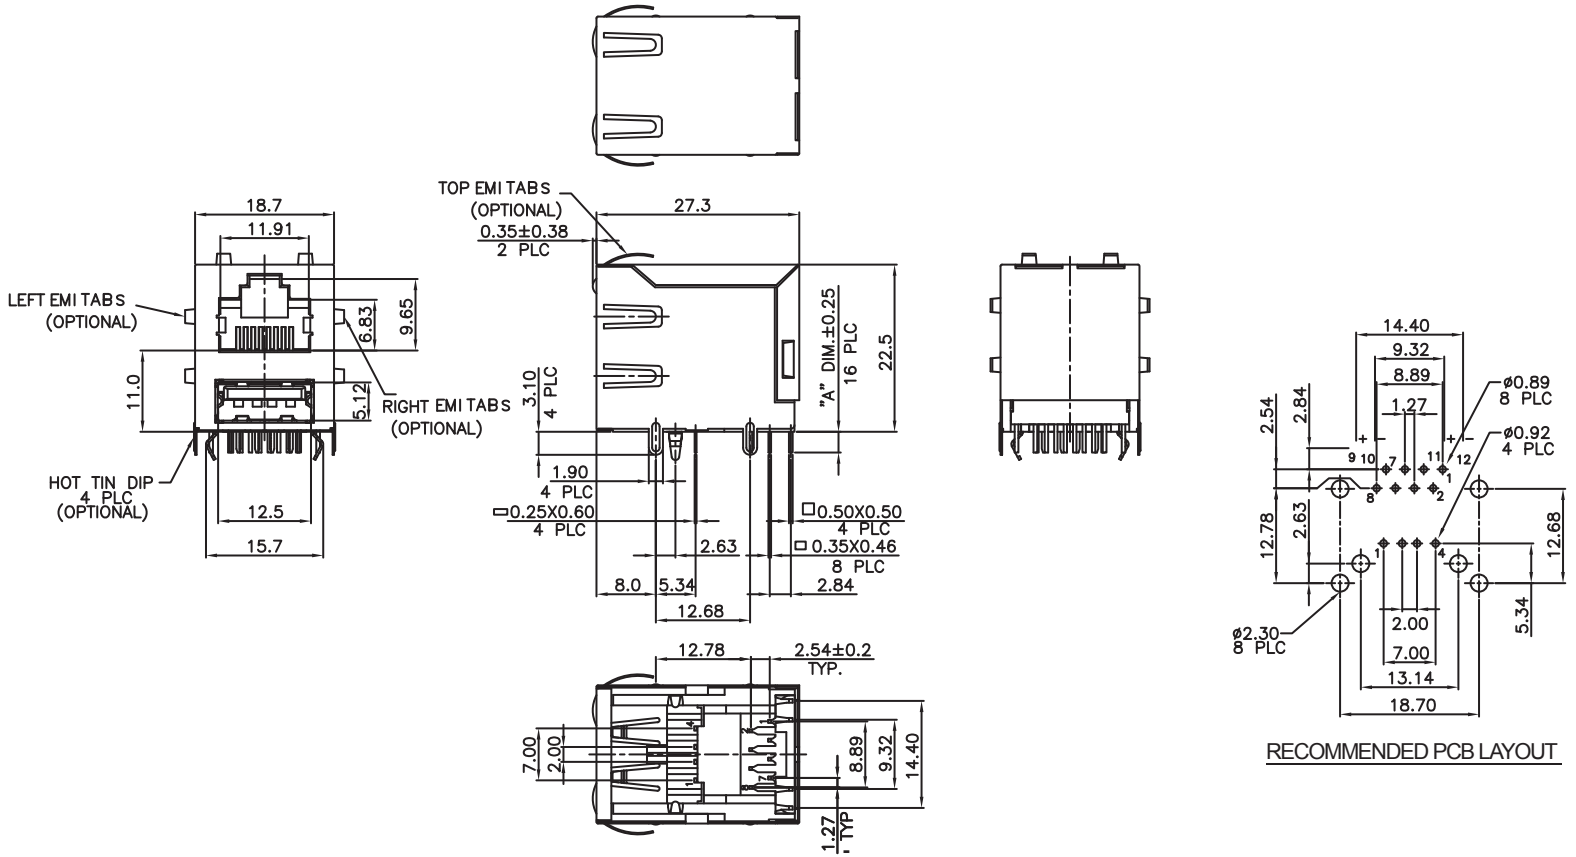

RECOMMENDED PCB LAYOUT

ELECTRICAL:

CURRENT RATING: 1.5A Max.
CONTACT RESISTANCE: 30 mW Max.
INSULATION RESISTANCE: 500 mW Min.
DIELETRIC WITHSTANDING VOLTAGE:
1000 Vrms 60 Sec. Min.

MATERIAL:

HOUSING: PBT Polyester
COLOR: Black
SPRING WIRE: 0.35mm Thickness Phosphor Bronze
Gold Plating Over Nickel

MECHANICAL:

DURABILITY: 500 Mating Cycles Min.
OPERATING TEMPERATURE: -25°C to +90°C

HOW TO ORDER:

U A 0 0 0 X 1 0 - 0 0 X - Z

RoHS COMPLIANT

USB CONNECTOR:
1 - 1 USB SSTANDARD PROFILE

SELECTIVE PLATING:
6 - Au FLASH CONTACT AREA/TIN TAIL
7 - 10u" Au CONTACT AREA/TIN TAIL
9 - 30u" Au CONTACT AREA/TIN TAIL

Rev		Drawn	Checked	Approved	Date
0	Issued	B.S.	S.M.	S.M.	07/01/13

SMP TECHNOLOGY, INC.

Combo Jack; RJ45 and (1) USB, Shielded, No LEDs

TOL. DEC. .X +/- 0.25 .XX +/- 0.13 .XXX +/- 0.05 ANGLE +/- 0°.30' UNIT: mm

P/N: UA00-X10-00X-Z