


DISTANCE BETWEEN PCB's (STACKING HEIGHT)	H
4.00H	2.90
4.50H	
5.00H	
5.50H	3.40
6.00H	
6.50H	
7.00H	3.90

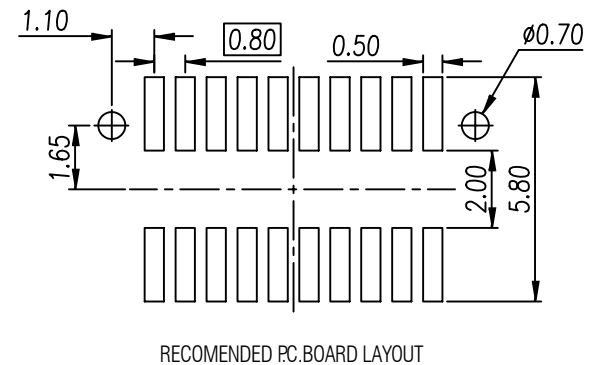


ELECTRICAL:

CURRENT RATING: 0.5A
 CONTACT RESISTANCE: < 20mΩ
 INSULATION RESISTANCE: 1000MΩ
 DIELECTRIC WITHSTANDING VOLTAGE: 300V AC/DC
 OPERATING TEMPERATURE: -40°C to +105°C

MATERIAL:

CONTACT: Phosphor Bronze
 INSULATOR: Polyester (UL94V-0) Nylon-9T

HOW TO ORDER:

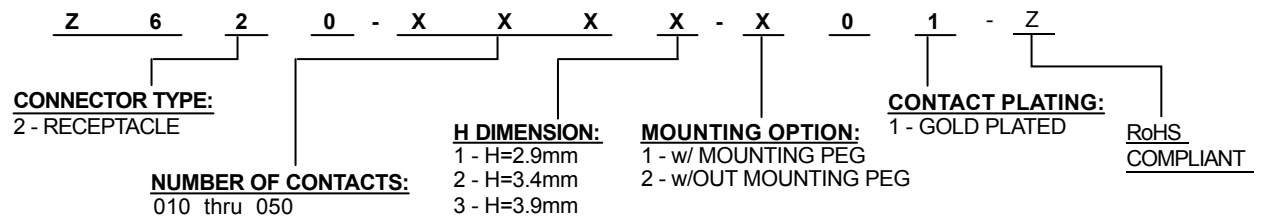

Rev	Drawn	Checked	Approved	Date
0	A.M.	S.M.	S.M.	04/25/03
A	B.S.	S.M.	S.M.	07/01/07

SMP TECHNOLOGY, INC.

BOARD TO BOARD RECEPTACLE 0.80mm Pitch

TOL. DEC. .X +/- 0.35 .XX +/- 0.2 .XXX +/- ANGLE +/- 5° UNIT: mm

P/N: Z620-XXXX-0X1-Z