







DIM A=1mm*(CKT-1)
 DIM B=DIM A+2.1mm
 DIM C=DIM A+4mm

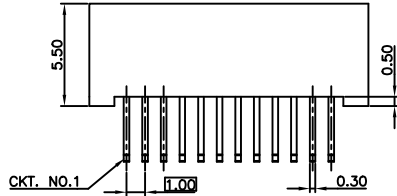

FFC/FPC DIMENSION
 THICKNESS 0.26~0.32mm
 TOLERANCE: 0.05mm

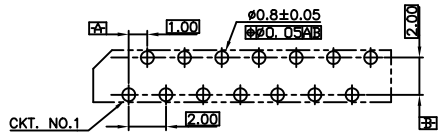

PC BOARD LAYOUT
 COMPONENT SIDE
 PCB T=0.6mm

ELECTRICAL:

CURRENT RATING: 0.5A
 CONTACT RESISTANCE:
 < 30 Milliohm Max.
 INSULATION RESISTANCE:
 > 1000 Megaohm Min.
 DIELECTRIC WITHSTANDING VOLTAGE:
 50V (rms) AC for 1 Minute
 OPERATING TEMPERATURE: -40°C to +105°C


MATERIAL:

INSULATOR: Thermoplastic, Nylon 46
 FLAMMABILITY RATING: UL 94V-0
 CONTACT MATERIAL: Copper Alloy
 PLATING: Tin Plating over Nickel

SOLDERABILITY:

PER MIL-STD-202F METHOD 208 D

HOW TO ORDER:

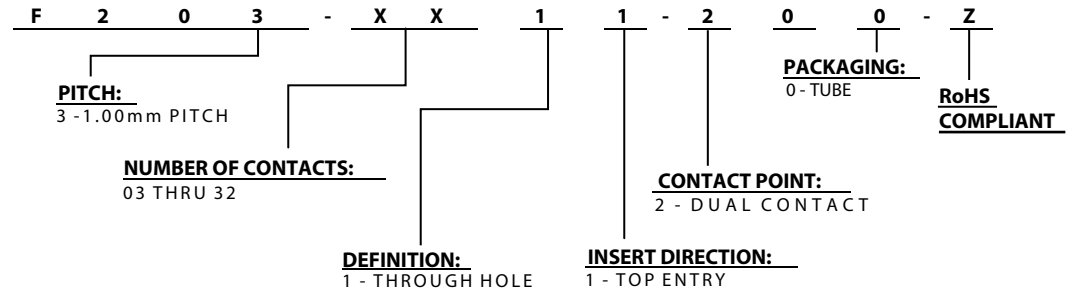

Rev		Drawn	Checked	Approved	Date
0	Issued	B.S.	S.M.	S.M.	3/1/07
SCALE	M A T ' L		F I N I S H		
TOL. DEC.	.X +/- 0.25	.XX +/- 0.20	.XXX +/- 0.10	ANGLE +/- 2°	UNIT: mm

S M P T E C H N O L O G Y , I N C .	
Flexible Cable Connector, LIF (FFC) Standard, 1.0mm Pitch	
P/N: F203-XX11-200-Z	P g : 1