







DIM A=1mm\*(CKT-1)  
 DIM B=DIM A+2.1mm  
 DIM C=DIM A+4mm

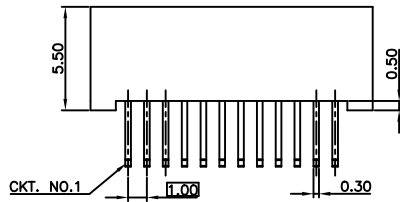

FFC/FPC DIMENSION  
 THICKNESS 0.26-0.32mm  
 TOLERANCE: 0.05mm

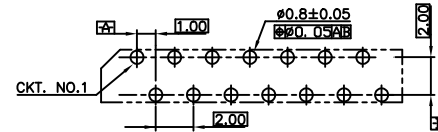

PC BOARD LAYOUT  
 COMPONENT SIDE  
 PCB T=0.6mm

**ELECTRICAL:**

CURRENT RATING: 0.5A  
 CONTACT RESISTANCE:  
 < 30 Milliohm Max.  
 INSULATION RESISTANCE:  
 > 1000 Megaohm Min.  
 DIELECTRIC WITHSTANDING VOLTAGE:  
 50V (rms) AC for 1 Minute  
 OPERATING TEMPERATURE: -40°C to +105°C


**MATERIAL:**

INSULATOR: Thermoplastic, Nylon 46  
 FLAMMABILITY RATING: UL 94V-0  
 CONTACT MATERIAL: Copper Alloy  
 PLATING: Tin Plating over Nickel

**SOLDERABILITY:**

PER MIL-STD-202F METHOD 208 D

**HOW TO ORDER:**

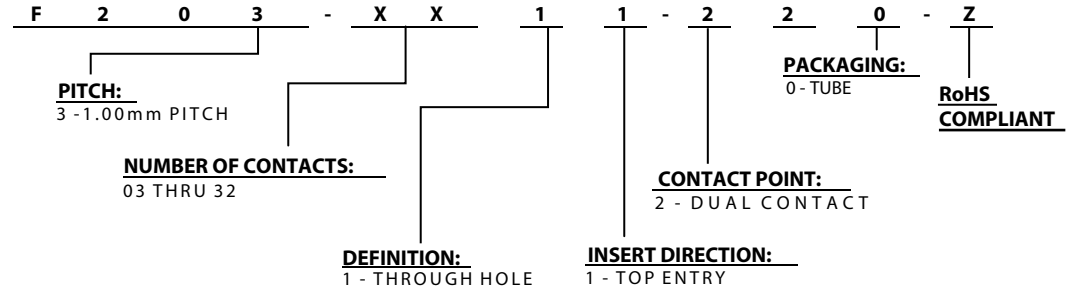

Rev	0	Issued	Drawn	B.S.	Checked	S.M.	Approved	S.M.	Date	3/1/07
SCALE	MAT'L		FINISH							
TOL. DEC.	.X +/- 0.25	.XX +/- 0.20	.XXX +/- 0.10	ANGLE +/- 2°	UNIT: mm					

<b>S M P TECHNOLOGY, INC.</b>	
Flexible Cable Connector, LIF (FFC) Reverse, 1.0mm Pitch	
P/N: F203-XX11-220-Z	Pg: 1