


HOW TO ORDER:

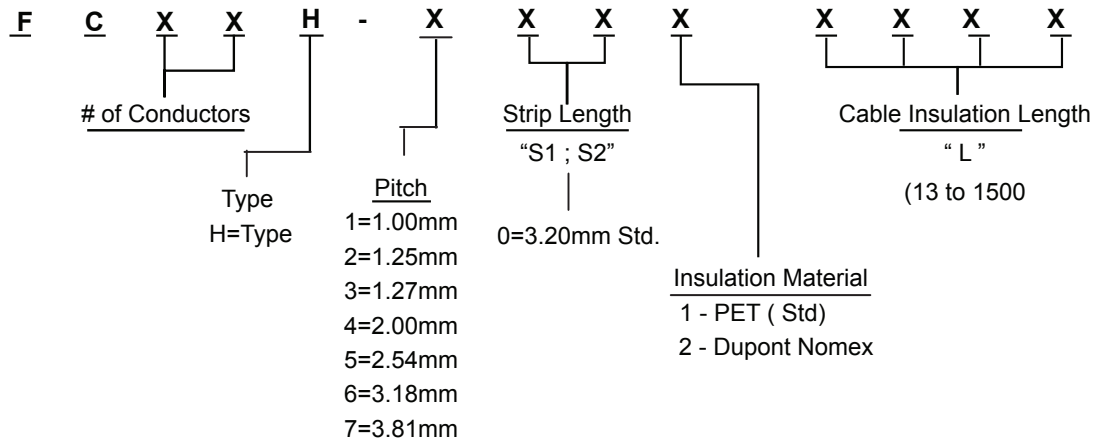

Pitch (mm)	1.00	1.25	1.27	2.00	2.54	3.18	3.81	5.08
Wire AWG	28	28	28	26	24	24	24	24
Current Rating (A)	1.0	1.6	1.6	2.0	3.0	3.5	3.5	4.0
Voltage Rating (Vac)	200	200	200	200	300	300	300	300
Min Breakdown @ 1 Min (Vac)	1025	1050	1050	1250	1500	1500	1500	1500
Process Temp (C)	200/ 4 Sec.			250/ 4 Sec.				
Operating Temp (C)	-40 to + 105							
# of Conductors	2~50	2~40	2~40	2~30	2~25	2~20	2~20	2~10
Conductor Diam. (mm +/- 0.02)	0.3	0.3	0.3	0.4	0.5	0.5	0.5	0.5
Cable Insulation Length (mm +/- 2)	13~500							

Example -

Type H Cable, 2.54mm Pitch, 16mm Cable Insulation Length, 3.2mm Strip Length, 10 Conductors
SMP Part Number = FC10H - 5001 - 16.00

Rev	Drawn	Checked	Approved	Date
0	B.S.	S.M.	S.M.	10/13/12

SMP TECHNOLOGY, INC.

FFC JUMPER CABLES; TYPE H