

**PCB LAYOUT  
(BOTTOM VIEW)**


**ELECTRICAL:**

CURRENT: 5 Amp  
 CONTACT RESISTANCE: 15mΩ Max  
 INSULATOR RESISTANCE: > 1000MΩ  
 DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.  
 OPERATING TEMPERATURE: -55° C TO +105° C

**MATERIAL:**

INSULATOR: PBT & 30% GLASS FIBER (UL94V-0)  
 CONTACT: COPPER ALLOY  
 CONTACT PLATING: OPTIONAL GOLD ALL OVER NICKEL

**HOW TO ORDER:**

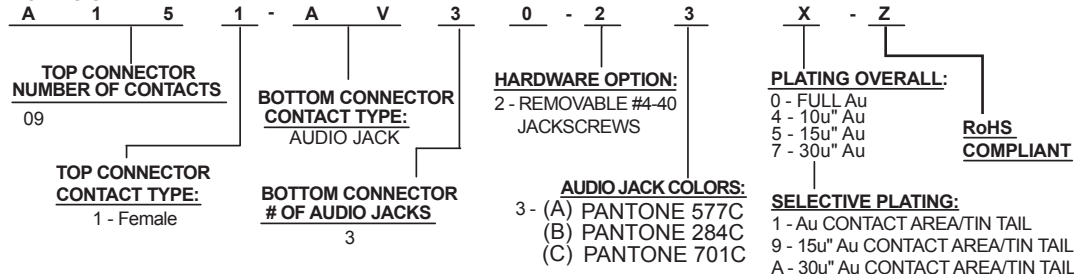

Rev	Drawn	Checked	Approved	Date
0	A.M.	S.M.	S.M.	11/19/04
A	G.T.	S.M.	S.M.	12/21/05

**SMP TECHNOLOGY, INC.**

D-Sub/ Audio Connector Combo; 15 Pos.High Density Female over 3 Audio Jacks

SCALE: N/A PC 99 Colors ( 577C,284C,701C)

TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- 0.25 ANGLE +/- UNIT: mm P/N: A151-AV30-23X-Z