


ELECTRICAL:
 CURRENT RATING: 3A
 CONTACT RESISTANCE:
 < 25 Milliohm Max.
 INSULATION RESISTANCE:
 > 5000 Megaohm Min.
 DIELECTRIC WITHSTANDING VOLTAGE:
 1000V (rms) for 1 Minute

MATERIAL:
 INSULATOR: PBT W/ 30% GLASS FIBER FILLED (UL94V-0)
 CONTACT: COPPER ALLOY
 SHELL: STEEL
 CONTACT PLATING: GOLD ON MATING SURFACE
 Sn ON TERMINATION END
 ALL OVER 50 µ" NICKEL

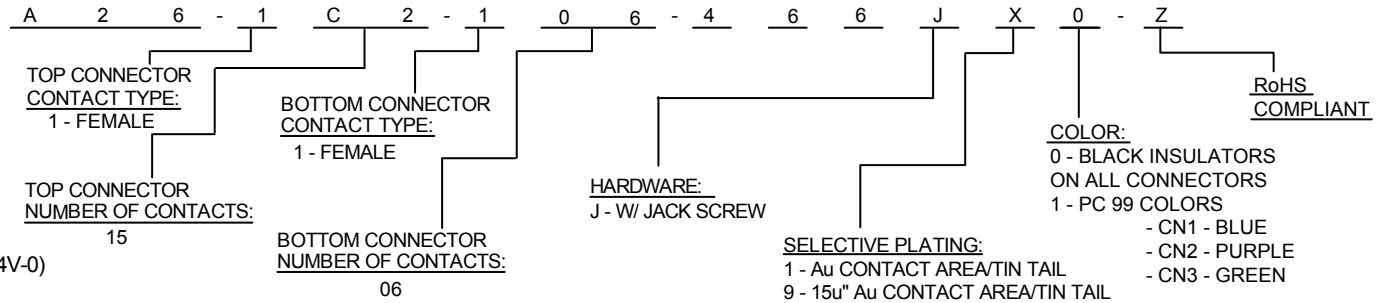


Rev	Drawn	Checked	Approved	Date
0	B.S.	S.M.	S.M.	02/22/12


SMP TECHNOLOGY, INC.

Stacked Connector, High Density D Sub, 15 Position,
 Over 6 Position Mini Din (Two)


OPTION 1:
FOUR .125 DIAMETER
NON-THREADED
MOUNTING HOLES




OPTION 2:
FOUR THREADED 4-40
MOUNTING HOLES



OPTION 3:
FOUR GROUNDING
BRACKETS

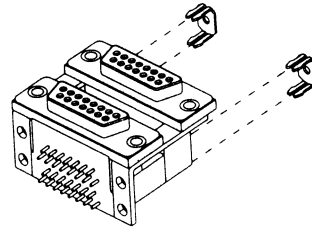

OPTION 4:
TWO GROUNDING
BRACKETS



Rev	Apv.	Date	
			SMP TECHNOLOGY, INC.
			Stacked Connector, High Density D Sub, 15 Position,
			Over 6 Position Mini Din (Two)
			P/N: A26-1C2-106-466JX0-Z
			Pg: 2