


MATES WITH PLUG CONFORMING TO FCC PART 68, SUBPART F.

RECOMMENDED PCB LAYOUT (TOP VIEW)  
RECOMMENDED THICKNESS 1.20 mm

**HOW TO ORDER:**

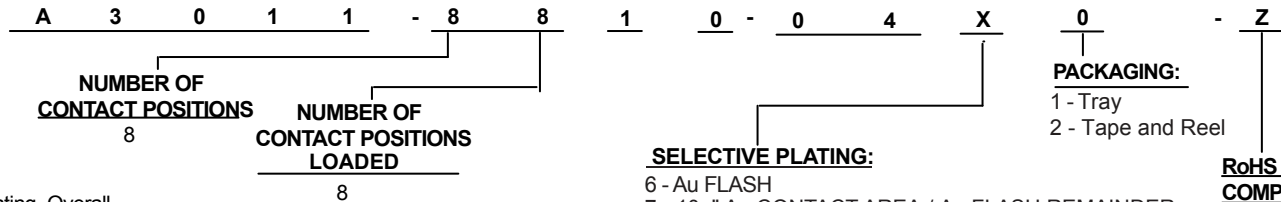

**ELECTRICAL:**

CURRENT RATING : 1.5 A Max  
VOLTAGE RATING : 150 VAC Max  
DIELECTRIC WITHSTANDING VOLTAGE: 1KVrms@60Hz;  
1 Min. between adjacent contacts

**MATERIAL:**

HOUSING: LCP; UL94V-0 Color - Black  
SHIELD: 0.20mm Thickness Copper Alloy; 50 - 80 u" Nickel Plating Overall  
CONTACT : Phosphor Bronze;  
CONTACT PLATING: Selective Gold Plating Contact Area over 50 u" Nickel;  
PC tail area 1u" Au .

**SELECTIVE PLATING:**

- 6 - Au FLASH
- 7 - 10u" Au CONTACT AREA / Au FLASH REMAINDER
- 8 - 15u" Au CONTACT AREA /Au FLASH REMAINDER
- 9 - 30u" Au CONTACT AREA /Au FLASH REMAINDER
- A - 50u" Au CONTACT AREA /Au FLASH REMAINDER

**PACKAGING:**

- 1 - Tray
- 2 - Tape and Reel

**RoHS COMPLIANT**

Rev	Drawn	Checked	Approved	Date
0	B.S.	S.M.	S.M.	05/15/11
SCALE:n/a				
TOL. DEC.	.X +/-	.XX +/- 0.25	.XXX +/- 0.15	ANGLE +/- UNIT: mm

<b>SMP TECHNOLOGY, INC.</b>	
PCB Jack, 1-Port, Low Profile; Mid Mount ;Shielded; Offset 1.05mm	
P/N: A3011-8810 -04X0 -Z	
Pg: 1	