

ELECTRICAL:

VOLTAGE RATING: 125 VAC RMS.

CURRENT RATING: 1.5A

CONTACT RESISTANCE: < 50 mW Max.

INSULATION RESISTANCE: > 1000 MW Min. at 500 VDC

DIELECTRIC WITHSTANDING VOLTAGE:

1000V (rms) AC 60Hz for 1 Minute

OPERATING TEMPERATURE: 0° C to +70° C

MATERIAL:


HOUSING: Thermoplastic (UL94V-0)

CONTACT: 0.35mm Thickness Phosphor Bronze

PLATING: Gold Plating over Nickel in Contact Area

Tin Plating over Nickel in Solder Area

HOW TO ORDER:

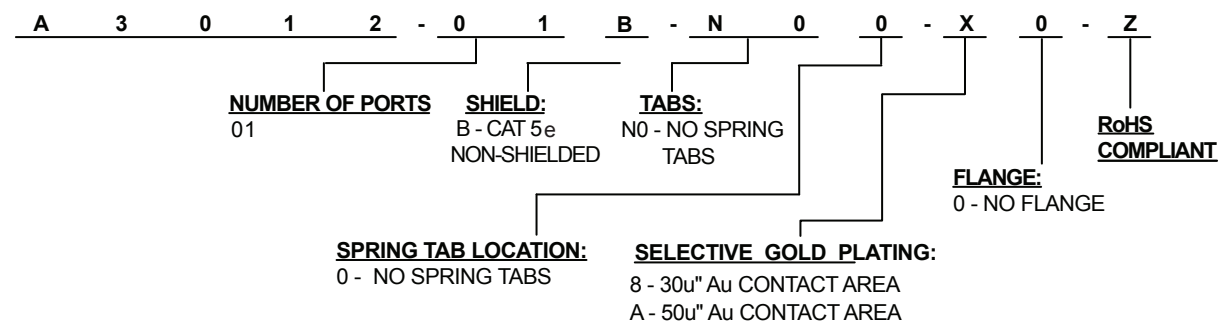

Rev	Drwan	Checked	Approved	Date
0	A.M.	S.M.	S.M.	12/08/05
A	B.S.	S.M.	S.M.	3/15/07
B	B.S.	S.M.	S.M.	6/10/08

SMP TECHNOLOGY, INC.

RJ45, 1 Port, Side Entry, CAT 5e

SCALE:n/a

TOL. DEC. .X +/- 0.2 .XX +/- 0.15 .XXX +/- 0.075 ANGLE +/- 0.5°

P/N: A3012-01B-N00-X0-Z