


**ELECTRICAL:**

CURRENT RATING: 3A  
 CONTACT RESISTANCE: 30mΩ Max.  
 INSULATOR RESISTANCE: 1000MΩ Min.  
 DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.  
 OPERATING TEMPERATURE: -40°C TO +105°C

**MATERIAL:**

INSULATOR: 30% Glass Fiber PBT  
 CONTACT: Copper Alloy

**HOW TO ORDER:**

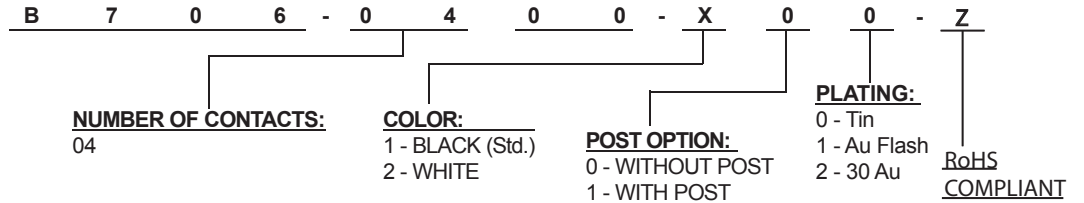

Rev	Drawn	Checked	Approved	Date
0 Issued	B.S.	S.M.	S.M.	7/11/07

**SMP TECHNOLOGY, INC.**

CD-ROM Header, Straight Type, w/o Mounting Post

TOL. DEC. .X +/- 0.2 .XX +/- .XXX +/- ANGLE +/- UNIT: mm

SERIES: B 7 0 6-0400-X00-Z