

ELECTRICAL:

CURRENT: 100VAC 1A MAX. / 12VDC 2A MAX.
 CONTACT RESISTANCE: 30mΩ Max.
 INSULATOR RESISTANCE: 100MΩ Min. AT 500VDC


MATERIAL:

INSULATOR: THERMOPLASTIC PBT (UL94V-0)
 CONTACT: COPPER ALLOY

MECHANICAL:

INSERTION FORCE: 4.0Kg Max.
 WITHDRAWAL FORCE: 0.9Kg Min.

HOW TO ORDER:

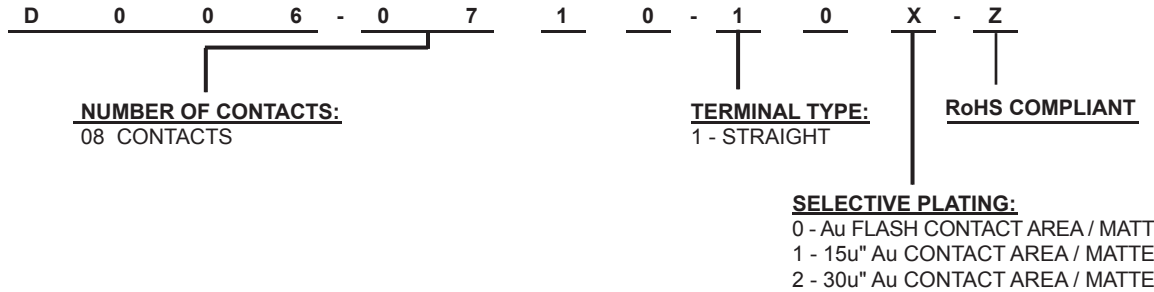

| Rev | Drawn | Checked | Approved. | Date |
|-----|-------|---------|-----------|----------|
| 0 | GT | S.M. | S.M. | 12/06/05 |
| A | B.S. | S.M. | S.M. | 02/05/09 |

| | |
|--|--|
| SMP TECHNOLOGY, INC. | |
| Mini Din Connector, 7 Position, Non-Shielded, Vertical PCB Mount | |