





Isometric View

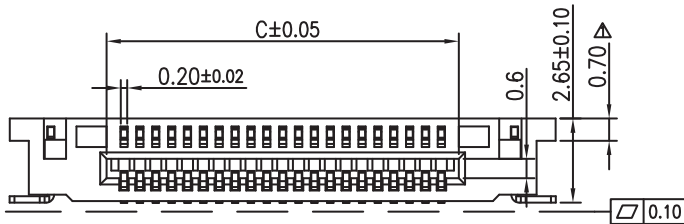

ELECTRICAL:

CURRENT RATING: 0.5 AMP
 VOLTAGE RATING: 50 VDC
 CONTACT RESISTANCE: < 50 mΩ
 INSULATOR RESISTANCE: >500MΩ
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC / 60sec.
 OPERATING TEMPERATURE: -40°C to +105°C

MATERIAL:

HOUSING: High Temperature Thermoplastic, UL94V-0, Color-Beige
 SLIDER: High Temperature Thermoplastic, UL94V-0
 CONTACT PLATING: Gold or Tin Plated (Bright or Matte) In Contact Area Over Nickel

HOW TO ORDER:

F 2 1 4 - X X 2 4 - 3 0 X - Z Z

NUMBER OF CONTACTS:

04 - 61 - SEE TABLE PAGE 2

PACKAGING:

0 - Tube
 2 - Tape & Reel

PLATING:

Blank - Bright Tin
 1 - Au Flash
 2 - Matte Tin

CONTACT:

3 - Upper Contact


**RoHS
 COMPLIANT**

Rev	Drawn	Checked	Approved	Date
0	B.S.	S.M.	S.M.	06/11/14

SMP TECHNOLOGY, INC.

FFC Connector, 0.5mm Pitch, Side Entry,
 Flip Type (Back), 2.65mm Height

NO.of Contacts	Dimensions			NO.of Contacts	Dimensions		
	A	B	C		A	B	C
4	8.70	1.50	2.60	33	23.20	16.00	17.10
5	9.20	2.00	3.10	34	23.70	16.50	17.60
6	9.70	2.50	3.30	35	24.20	17.00	18.10
7	10.20	3.00	4.10	36	24.70	17.50	18.60
8	10.70	3.50	4.60	37	25.20	18.00	19.10
9	11.20	4.00	5.10	38	25.70	18.50	19.60
10	11.70	4.50	5.60	39	26.20	19.00	20.10
11	12.20	5.00	6.10	40	26.70	19.50	20.60
12	12.70	5.50	6.60	41	27.20	20.00	21.10
13	13.20	6.00	7.10	42	27.70	20.50	21.60
14	13.70	6.50	7.60	43	28.20	21.00	22.10
15	14.20	7.00	8.10	44	28.70	21.50	22.60
16	14.70	7.50	8.60	45	29.20	22.00	23.10
17	15.20	8.00	9.10	46	29.70	22.50	23.60
18	15.70	8.50	9.60	47	30.20	23.00	24.10
19	16.20	9.00	10.10	48	30.70	23.50	24.60
20	16.70	9.50	10.60	49	31.20	24.00	25.10
21	17.20	10.00	11.10	50	31.70	24.50	25.60
22	17.70	10.50	11.60	51	32.20	25.00	26.10
23	18.20	11.00	12.10	52	32.70	25.50	26.60
24	18.70	11.50	12.60	53	33.20	26.00	27.10
25	19.20	12.00	13.10	54	33.70	26.50	27.60
26	19.70	12.50	13.60	55	34.20	27.00	28.10
27	20.20	13.00	14.10	56	34.70	27.50	28.60
28	20.70	13.50	14.60	57	35.20	28.00	29.10
29	21.20	14.00	15.10	68	35.70	28.50	29.60
30	21.70	14.50	15.60	59	36.20	29.00	30.10
31	22.20	15.00	16.10	60	36.70	29.50	30.60
32	22.70	15.50	16.60	61	37.20	30.00	31.10

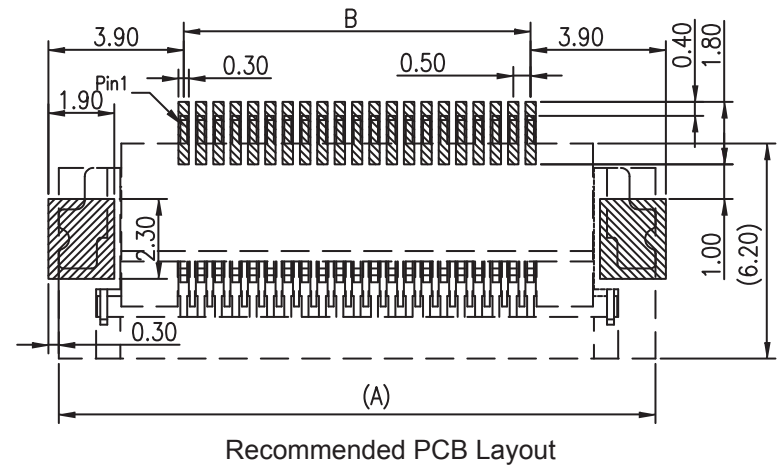

SMP TECHNOLOGY, INC.

FFC Connector, 0.5mm Pitch, Side Entry,
Flip Type (Back), 2.65mm Height