


SPECIFICATIONS:

CONDUCTOR: #30 AWG STRANDED (7/0.102mm)
 CONDUCTOR: #30 AWG SOLID
 SPARK TEST: 2500V
 DIELECTRIC STRENGTH TEST: MIN 2KV IN 1 MINUTE
 CONDUCTOR RESISTANCE: MAX 237Ω /Km
 INSULATION RESISTANCE: MIN 1GΩ /Km
 CAPACITANCE: 22.5pF/Ft
 INDUCTANCE: .317uH/Ft
 IMPEDANCE: 75 Ω
 PROPAGATION DELAY TIME: 1.7nS/Ft
 INSULATOR MATERIAL: PVC, COLOR GRAY

UL & CSA GRADE:

UL STYLE: 20080
 RATED TEMPERATURE: -20°C TO 105°C
 RATED VOLTAGE: 150V
 FLAME TEST: VW-1
 CSA STANDARD: C22.2 No. 210.2
 RATED TEMPERATURE: -20°C TO 105°C
 RATED VOLTAGE: 150V
 FLAME TEST: FT1, FT2

HOW TO ORDER:

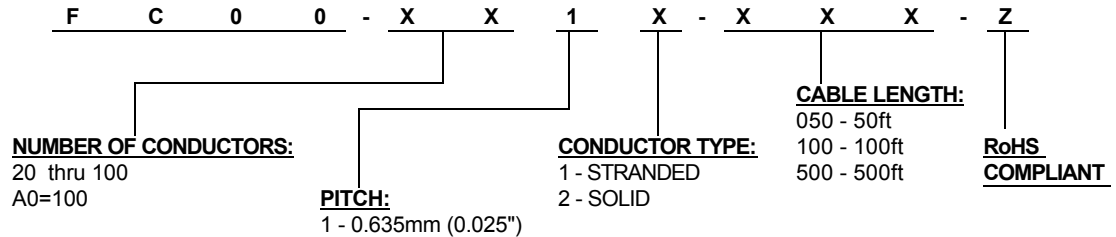

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	Issued	S.E.	S.M.	4/15/97	
A	Revised for RoHS Compliance	B.S.	S.M.	7/1/07	
					FLAT RIBBON CABLE, 0.635mm Pitch
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/-	ANGLE +/-	UNIT: mm
					P/N: FC00-XX1X-XXX-Z
					Pg: 1