


MATERIALS:

HOUSING: High Temperature Thermoplastic UL94-VO
 CONTACTS: Copper Alloy
 PLATING: Specified Gold Plating Thickness in Contact Area,
 Tin Plating on OC Tail, All Over 50µ" Nickel

ELECTRICAL:

OPERATING CURRENT: 0.5A MAX.
 OPERATING TEMPERATURE: -20°C TO +85°C
 DIELECTRIC WITHSTANDING VOLTAGE:
 500Volts AC Between Adjacent Terminal (Unmated)
 300Volts AC Between Adjacent Terminal (Mated)
 INSULATION RESISTANCE:
 100 Mohm MIN. (Unmated), 10 Mohm MIN. (Mated)

HOW TO ORDER:

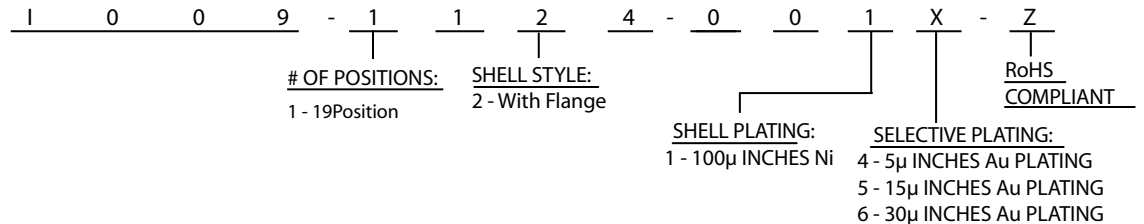

Rev	Drawn	Checked	Approved	Date
0	B.S.	S.M.	S.M.	04/04/12

SMP TECHNOLOGY, INC.

High Definition Multimedia Interface (HDMI) Receptacle,
 Right Angle, Type 2, With Mtg. Pegs, Flange (8.0mm)