


MATERIAL:

HOUSING: LCP +30% Glass Fill UL94-VO - Black
 CONTACTS: Copper Alloy
 PLATING: Specified Gold Plating Thickness in Contact Area,
 Tin Plating on Remainder of Contact, All Over 50µ" Nickel Subplate
 SHELL: Stainless Steel **A**

ELECTRICAL

OPERATING CURRENT: 0.5A Max./Contact
 OPERATING TEMPERATURE: -40°C TO +85°C
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC for 1 Minute
 INSULATION RESISTANCE: 100 Mohm Min..
 VOLTAGE RATING : 40 VAC Max.

HOW TO ORDER:

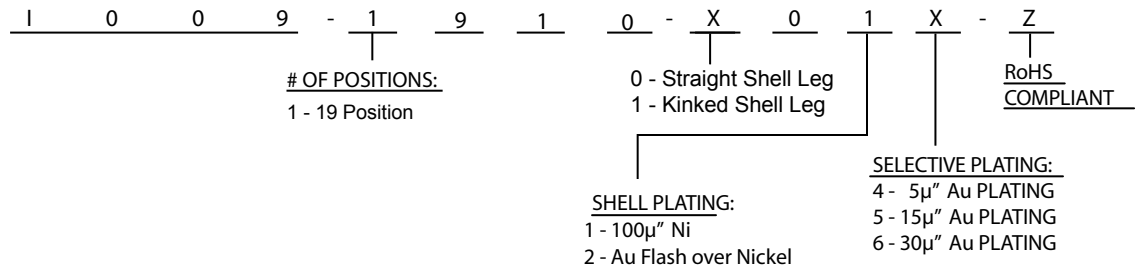

Rev	Drawn	Checked	Approved	Date
0	B.S.	S.M.	S.M.	03/14/12
A	B.S.	S.M.	S.M.	11/14/16

SMP TECHNOLOGY, INC.

High Definition Multimedia Interface Upright (HDMI) Receptacle,
 Right Angle, 19 Position, With Mtg. Pegs