





Front Panel Jack Only  
Clearance W/O Latch  
Feature




Single Panel - Latch  
Clearance Panel  
Thickness 0.062 inch

**RECOMMENDED PANEL CUTOUT**

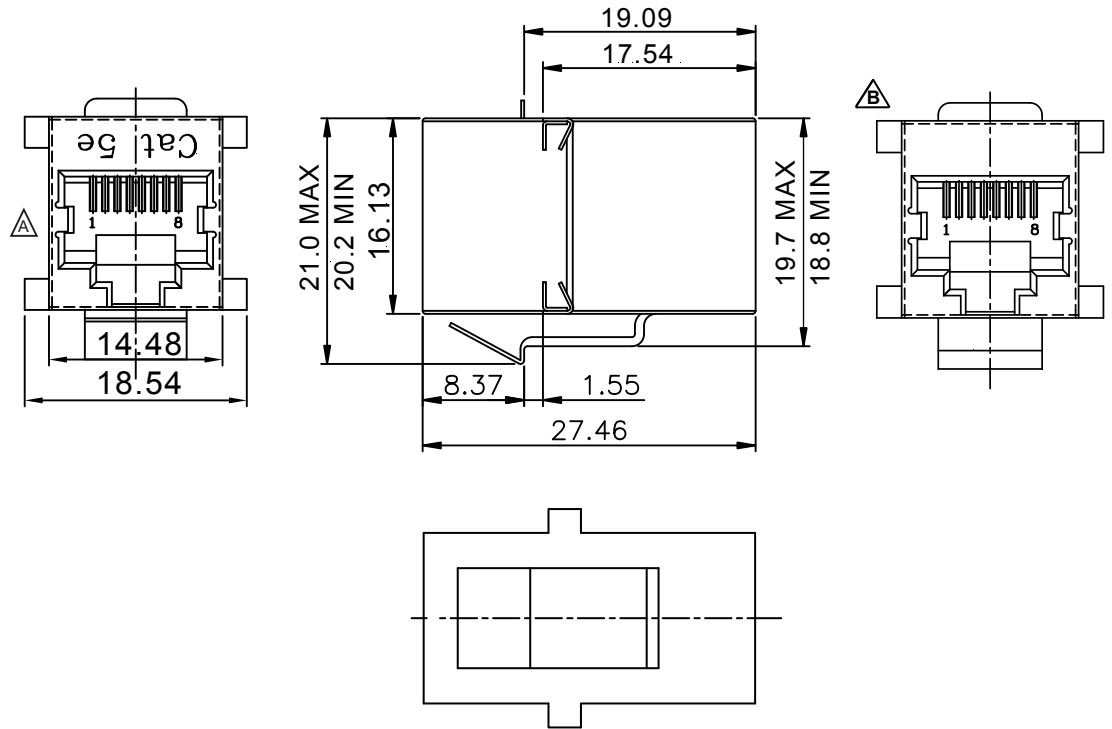

**HOW TO ORDER:**

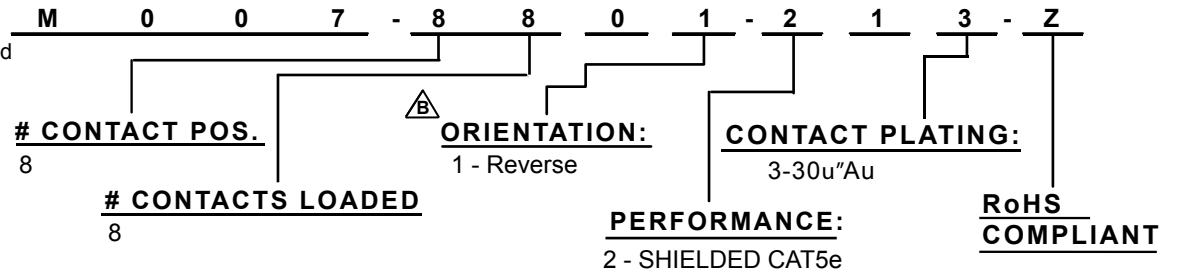

**ELECTRICAL:**

VOLTAGE / CURRENT: 1000V / 1.5 AMPS MAX.  
INSULATION RESISTANCE: > 500 Mohm Between Adjacent Terminal & Ground  
DIELECTRIC WITHSTANDING VOLTAGE:  
1000V (rms) AC for 1 Minute

**MATERIAL:**

INSULATOR: Thermoplastic UL94V-0  
CONTACT: 0.35mm Thickness Phosphor Bronze,  
Gold Plating over Nickel in Contact  
SHIELD: Stainless Steel

**MECHANICAL:**

Durability: 1000 Cycles

Rev	Drawn	Checked	Approved	Date
0	B.S.	S.M.	S.M.	09/28/11
A	B.S.	S.M.	S.M.	03/01/18
B	B.S.	S.M.	S.M.	04/26/18

**SMP TECHNOLOGY, INC.**

Modular Coupler Jack, Panel Mount, Shielded CAT 5e, Reverse

Orientation

TOL. DEC. .X +/- 0.38 .XX +/- 0.25 .XXX +/- 0.10 ANGLE +/- UNIT: mm

SERIES: M007-8801-213-Z