


**ELECTRICAL:**

CURRENT RATING: 1A  
 CONTACT RESISTANCE: < 35m Ω  
 INSULATOR RESISTANCE: > 500M Ω  
 DIELECTRIC WITHSTANDING VOLTAGE: 250VAC FOR 1 MIN.  
 OPERATING TEMPERATURE: -55° C TO +105° C

**MATERIAL:**

INSULATOR: PBT w/ Glass Filled Reinforced UL94V-0  
 CONTACT MATERIAL: Phosphor Bronze

**HOW TO ORDER:**

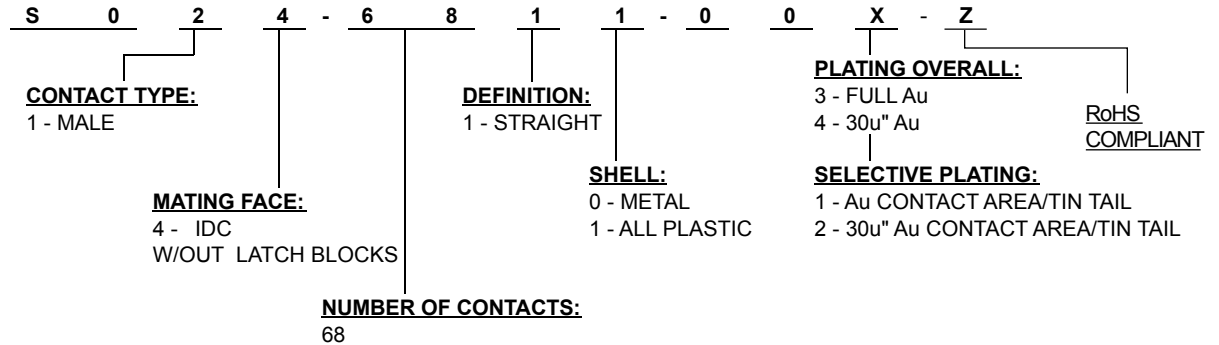

Rev	Drawn	Checked	Approved	Date
0	S.E.	S.M.	S.M.	1/15/98
A	S.E.	S.M.	S.M.	12/6/00
B	B.S.	S.M.	S.M.	07/21/08

**SMP TECHNOLOGY, INC.**

Half Pitch D-Sub Connector, 68-Pos, Male , All Plastic

DRAWING NO. S024-1

TOL. DEC. .X +/- 0.35 .XX +/- 0.20 .XXX +/- 0.05 ANGLE +/-5 UNIT: mm

SERIES: S 0 2 4