


ELECTRICAL:

CURRENT RATING: 0.5A
 CONTACT RESISTANCE:
 < 30 Milliohm Max.
 INSULATION RESISTANCE:
 > 1000 Mgeaohm Min.
 DIELETRIC WITHSTANDING VOLTAGE:
 750V (rms) AC for 1 Minute
 OPERATING TEMPERATURE: -55° C to +125° C

MATERIAL:

INSULATOR: LCP; 30% Glass Filled; UL94V-0; Black
 CONTACTS: Phosphor Bronze
 CONTACT PLATING:
 30u" Gold Plating over 50u" Nickel in Contact Area
 3~8u" Gold Plating on Solder Area of Terminal
 SHELL: Copper Alloy
 SHELL PLATING: 40u" Nickel

HOW TO ORDER:

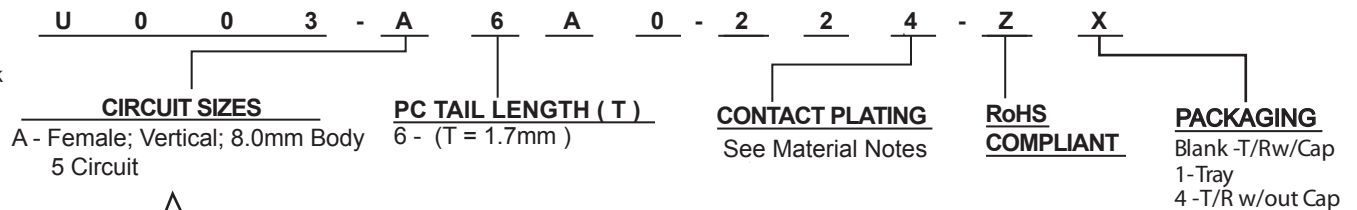

B Other Tail Length Options Available
 MOQ's Will Apply

| Rev | Drawn | Checked | Approved | Date |
|-----|-------|---------|----------|----------|
| 0 | B.S. | S.M. | S.M. | 10/15/08 |
| A | B.S. | S.M. | S.M. | 10/27/08 |
| B | B.S. | S.M. | S.M. | 07/02/14 |

SMP TECHNOLOGY, INC.

Mini USB, 5 Position, Vertical, Surface Mount