


Isometric View

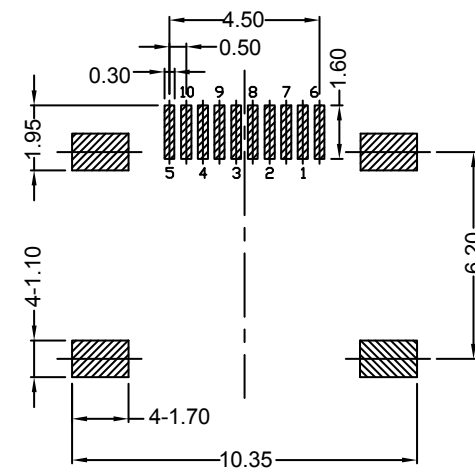

Recommended PCB Layout

MATERIAL:

Housing: LCP+30% Glass Filled, Black
 Shell: Stainless Steel, Tin Plated
 Terminal: Copper Alloy

ELECTRICAL:

Signal Contact Current Rating: .30 AMPS
 Signal Contact Resistance: 50 milliohms Max.
 Dielectric Withstanding Voltage: 100 VAC
 Insulation Resistance: 100 Megaohms Min.
 Operating Temperature Range : -30°C ~ 80°C

HOW TO ORDER:

U 0 0 3 - T 1 M 0 - 1 2 X - Z 2

SELECTIVE CONTACT PLATING
 1 - Au Flash
 2 30u" Au Over Ni

RoHS COMPLIANT

PACKAGING
 2- Tube w/out Cap

Rev	Drawn	Checked	Approved	Date
0 Issued	B.S.	S.M.	S.M.	02/27/13
A Drawing Update	B.S.	S.M.	S.M.	01/08/20

SMP TECHNOLOGY, INC.

Mini USB Receptacle; Right Angle; 10 Position; Surface Mount

Scale: N/A
 TOL. DEC. .X +/- 0.3 .XX +/- 0.25 .XXX +/- 0.15 ANGLE +/- 2° UNIT: mm

U003-T1M0-12X-Z2