
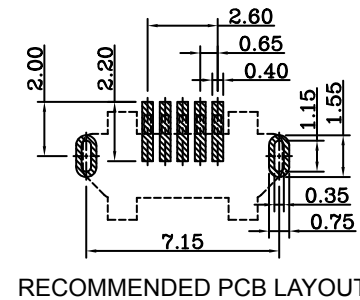





ISOMETRIC VIEW

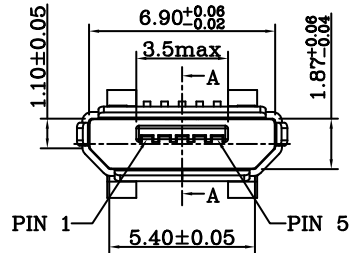


ELECTRICAL:

VOLTAGE RATING: 30 Volts AC (RMS)
 CURRENT RATING: Signal Pins (2,3,4) 1 AMP, Power Pins (1,5) 1.8 AMP
 DIELECTRIC STRENGTH: 100V AC 1 Minute
 INSULATION RESISTANCE: 100 MΩ Min.
 CONTACT RESISTANCE: 30 mΩ Max.

MATERIALS:

HOUSING: High Temperature Thermoplastic, UL94-VO
 COLOR: Black
 CONTACTS: Copper Alloy
 SHELL: Steel
 TEMPERATURE RANGE: -30°C to +85°C

HOW TO ORDER:

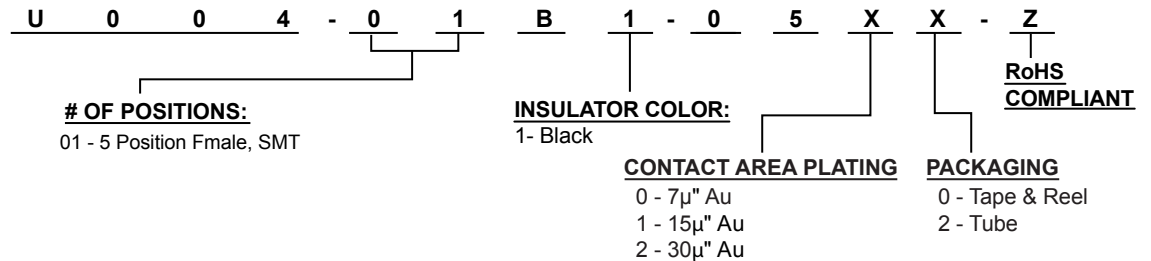

Rev	Drawn	Checked	Approved	Date
0	B.S.	S.M.	S.M.	06/12/13

SMP TECHNOLOGY, INC.

Micro USB 2.0, 5 Position, Receptacle, Vertical, SMT

Tolerance : Dimension .X +/- 0.30 .XX +/- 0.20 .XXX +/- 0.10

SERIES: U004-01B1-05XX-Z