



**DOE Level VI & EU Tier I
Efficiency Compliant**

PT200 Series 200 Watts

AC/DC Switching Adapter - Single Output

FEATURES

- Meet DOE Level VI & European Tier I Efficiency Requirements
- 2 Year Warranty
- FCC Part 15 Class B, Compliance
- Safety Approvals, EMC compliance
- 40mm cooling fan with Fan Speed control
- IEC 60950 / 2nd Edition
- No Load Power Consumption: <210mW

ELECTRICAL SPECIFICATIONS

- Input range : 90-264VAC (Full Range)
- Frequency : 47 - 63Hz
- Power factor : >0.95@115 VAC;>.90@230VAC
- Input current (rms) : 3A @ 90VAC; 1.5A @ 264VAC MAX
- Efficiency : >88% @ average load 115/230 VAC
- Earth Leakage Current: < 228uA @ 264VAC
- Maximum power (Po) : 200W
- Ripple & Noise : 1%
- Hold-up time : >16ms typical at full load @ 115VAC
- Protection : Over voltage protection(OVP), AC recycle
Short circuit protection, Auto recovery
Overload protection



Dimension : L188.5×W104.5×H60mm
AC Input : IEC 320-C14 Inlet

SAFETY STANDARDS

UL 60950-1
TUV EN60950-1
CB IEC 60950-1

EMI STANDARDS

FCC Class B
EN 55022 Class B
C E

ENVIRONMENTAL

- Operating temperature : -0°C to +70°C (Derate linearly 2.5% per °C from 51-70 °C)
- Storage temperature : -20°C to +85°C ● Humidity 10% - 90%
- MTBF : >100,000 hours at full load and 25°C ambient temperature

DC OUTPUT & FEATURES

Model	Output Rating		Po(Max.)	O/P Regulation	Ripple & Noise (Vp-p)	Efficiency Level
	Vo	Io (max)				
PT200-12-B	12V	16.66 A	200W	5%	240mV	VI
PT200-16-B	16V	12.50 A	200W	5%	300mV	VI
PT200-19-B	19V	10.53 A	200W	5%	300mV	VI
PT200-20-B	20V	10.0 A	200W	5%	300mV	VI
PT200-24-B	24V	8.33 A	200W	5%	300mV	VI
PT200-36-B	36V	5.555 A	200W	5%	300mV	VI
PT200-48-B	48V	4.166 A	200W	5%	300mV	VI

Note: 1. Ripple and Noise are measured at oscilloscope 20MHz bandwidth with a electrolytic 10uF and 0.1uF ceramic capacitor in parallel at the output connector.



SMP TECHNOLOGY, INC.

5900 Butler Lane, Scotts Valley, CA 95066


Tel : (831) 440-9191 Fax : (831) 427-7570

http : //www.smp-tech.com

E-Mail : sales@smp-tech.com

AC/DC Switching Adapter - Single Output

MECHANICAL SPECIFICATION

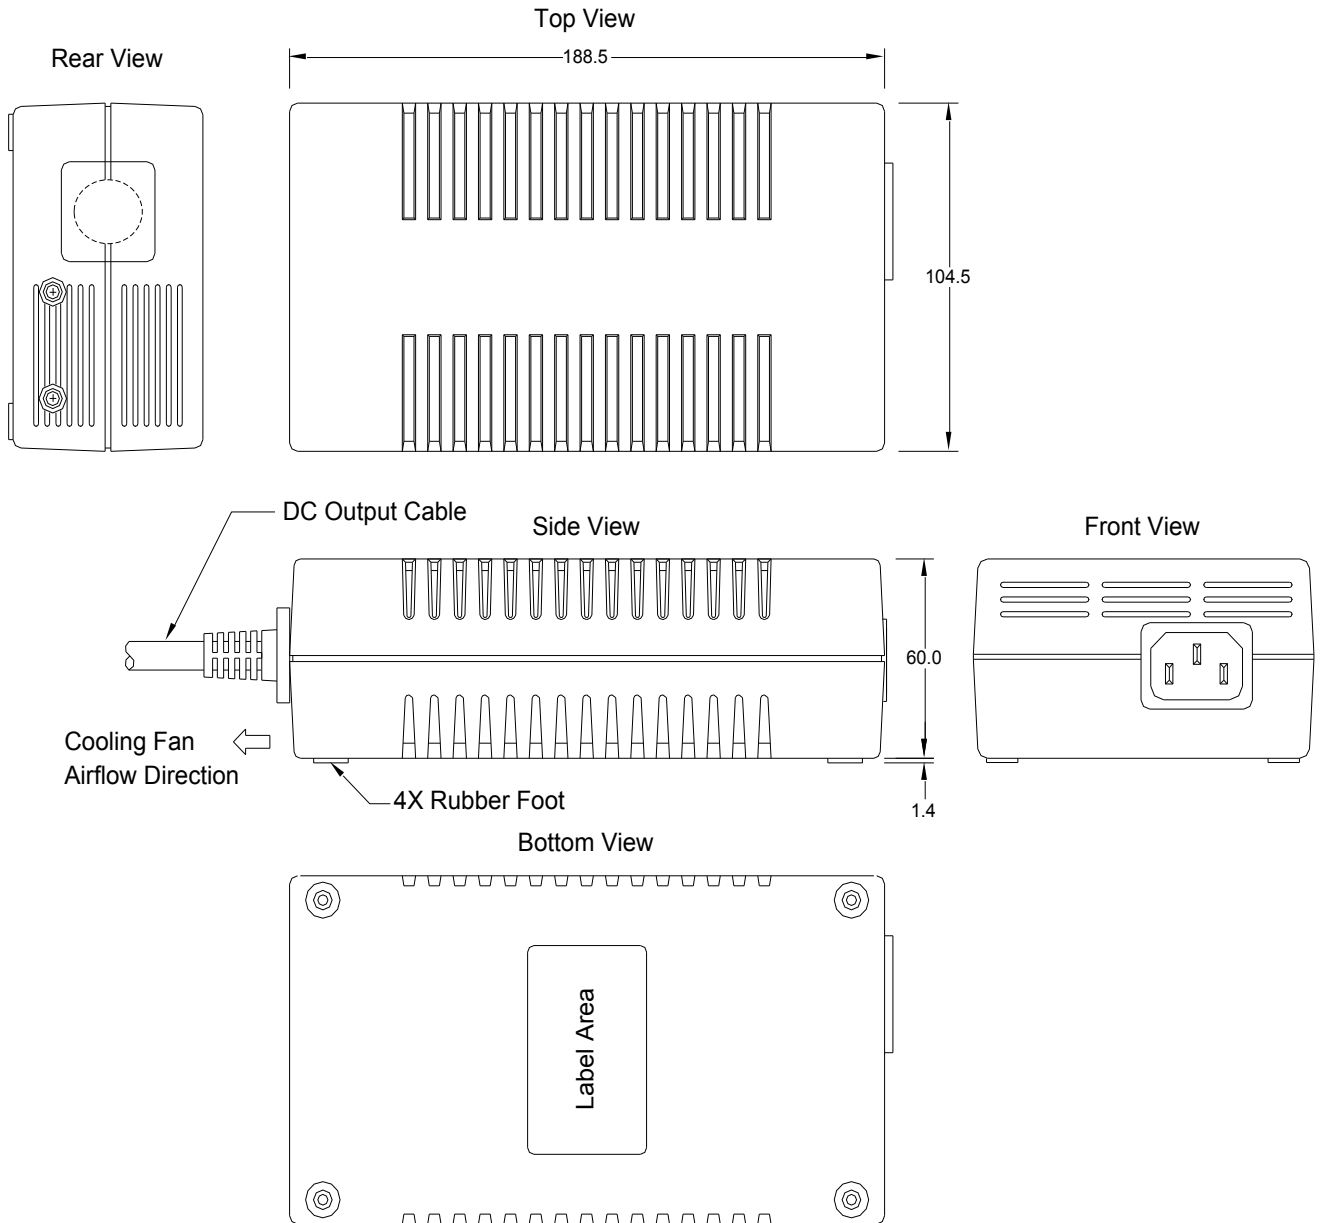

NOTES:

- CASE COLOR: Black
- AC INLET: IEC320-C14
- DC CABLE: UL2468 20AWG Length = 1500mm (59.1 inches)
- TOLERANCE: $\pm 0.5\text{mm}$



SMP TECHNOLOGY, INC.

5900 Butler Ln, Scotts Valley, CA 95066

Tel : (831) 438-9191 Fax : (831) 427-7570

http : //www.smp-tech.com

E-Mail : sales@smp-tech.com