

**AC/DC Switching Adapter - Single Output**

**FEATURES**

- High Reliability
- 100% BURN-IN Tested
- 100% Hi-Pot tested
- 40 mm cooling fan w/ fan speed control
- Safety Approvals, EMC compliance

**ELECTRICAL SPECIFICATIONS**

- Input range : 90 - 264VAC (Full Range)
- Frequency : 47 - 63Hz
- Input current (rms) : 3A @ 90VAC; 1.5A @ 264VAC MAX.
- Power factor : >0.9 @ full load, 115VAC/230VAC
- Efficiency : >87% @ AVG. load 115/230 VAC
- Meet CEC and Energy Star level IV requirements.
- Green functions=No load power consumption <500mW
- Output Voltage : +12V to +48V
- Voltage regulation : ±5%
- Maximum power (Po) : 200W
  
- Hold-up time : >16ms typical at full load @ 115VAC
- Protection :
  - ◆ Short Circuit Protection: Auto Recover.
  - ◆ Over Load Protection: Auto Recover.
  - ◆ Over voltage Protection: Latch, AC recycle.

**ENVIRONMENTAL**

- Operating temperature : 0°C to +50°C
- Storage temperature : -10°C to +85°C
- Humidity: 10% ~ 95%.
- MTBF : >140,000 hours at full load and 25°C ambient temperature

**DC OUTPUT & FEATURES**

Model	Output Rating		Po	O/P Regulation	Ripple & Noise(Vp-p)	CEC IV	Energy Star
PT 0200-12-B	12V	16.66A	200W	±5%	240mV	●	V
PTM200-16-B	16V	12.50A	200W	±5%	300mV	●	V
PTM200-19-B	19V	10.53A	200W	±5%	300mV	●	V
PTM200-20-B	20V	10A	200W	±5%	300mV	●	V
PTM200-24-B	24V	8.33A	200W	±5%	300mV	●	V
PTM200-36-B	36V	5.555A	200W	±5%	300mV	●	V
PTM200-48-B	48V	4.166A	200W	±5%	300mV	●	V

Note: 1. Peak-to-peak with 20MHz bandwidth with a tantalum 10uF in parallel with a 0.1uF ceramic capacitor.

With Active PFC



Dimension : L 188.5 × W 104.5 × H 60 mm  
( L 7.42" × W 4.1" × H 2.36" )  
AC Input : IEC 320-C14 Inlet

**SAFETY STANDARDS**


- UL60601-1
- CSA C22.2-No. 60601-1
- TUV EN60601-1
- CB IEC60601-1

**EMC STANDARDS**

- EN60601-1-2
- FCC Part 18 Class B
- EN55011 Class B
- CE



**MECHANICAL SPECIFICATION**

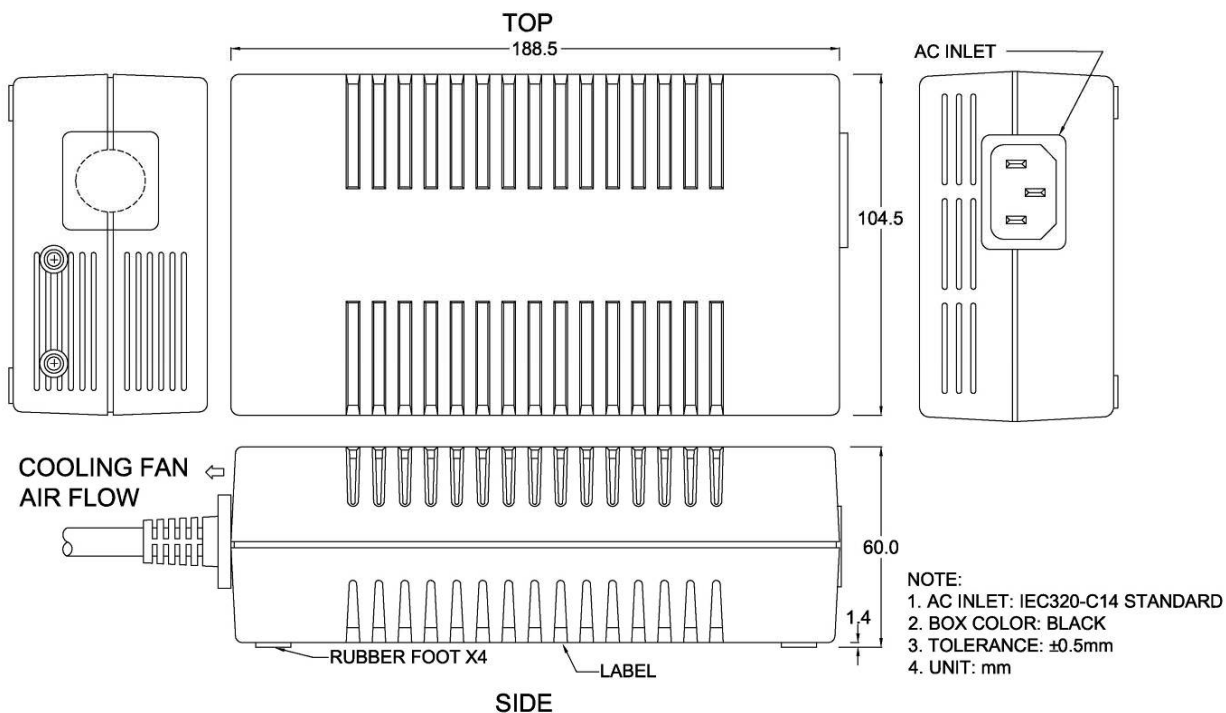

**STANDARD OUTPUT CABLE**

1. AWM 2464 # 16AWG / 4C + SHIELDING, UL 80°C 300V VW-1, 1000 mm+-30mm(MIN)
2. Depends on customers requirements.

