

UNIT:mm


MODEL	INPUT	OUTPUT VOLTAGE	OUTPUT CURRENT	POWER OUTPUT
SAU203	AC 100 ~ 240V (50 / 60Hz)	3V	3A	
SAU203		3.3V	3A	10W
SAU205		5V	2.6A	13W
SAU205		5V	3A	15W
SAU206		6V	2.8A	17W
SAU209		9V	2A	18W
SAU212		12V	1.5A	18W
SAU215		15V	1.2A	18W
SAU224		24V	0.75A	18W

FOR OUTPUT PLUG TABLE
SEE PAGE 2

Specifications:

Input voltage	100-240 VAC (Limits: 90-246VAC)
Input voltage	100-120 VAC (Limits: 90-132VAC)
Input frequency	50 to 60 Hz (Limits: 47-63 Hz)
Output voltage	See tables above
Output current	See tables above
Output power range	15 Watts maximum (see tables below)
Over voltage protection	120%
Over current protection	120%
Short Protection	Auto Recovery
Load Regulation	5%
Operating temperature	0° C ~ +55° C
Storage temperature	-20° C ~ +85° C
Relative humidity	5% ~ 95% non-condensing
Efficiency	75% minimum
Insulation resistance	DC500V, 100M Ohm (Min .)
Withstand voltage	3000 VAC / Min. from input to output, 5mA (Max.)
Safety requirements	Meets or Exceeds: T-MARK, UL, CUL, CE
Warranty	1 year

SAU Series:

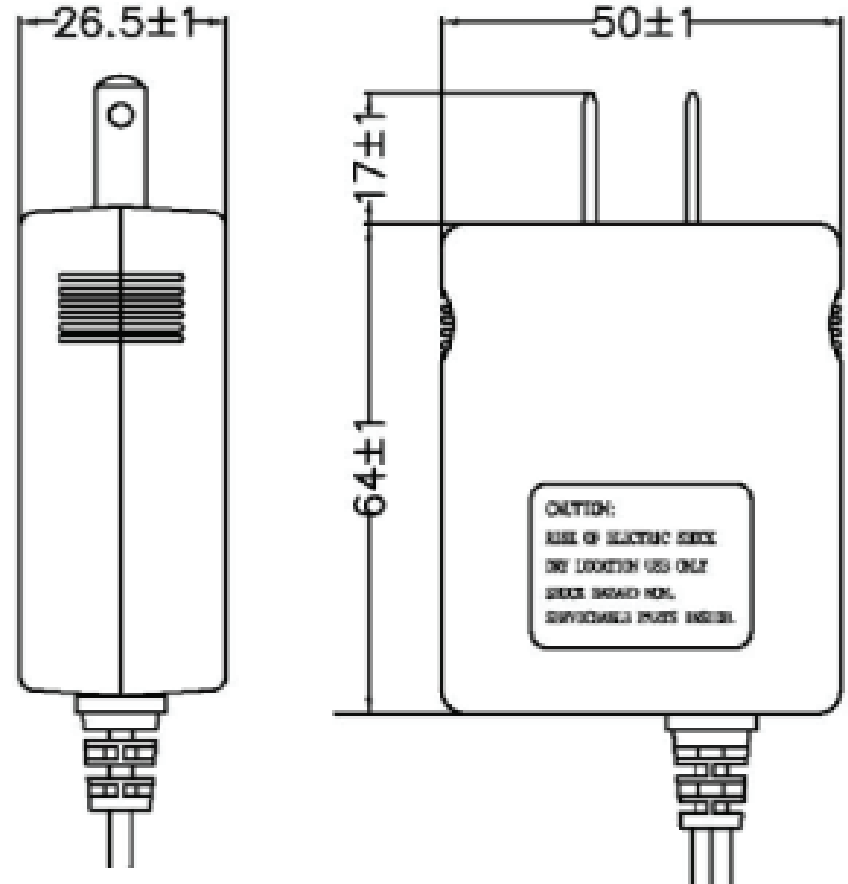

SMP TECHNOLOGY, INC.

WALLMOUNT SWITCHING POWER SUPPLY, 9 - 18 WATT,
VENTLESS, UNIVERSAL INPUT VOLTAGE, STRAIGHT, PLUG-IN [US]
SERIES:SAU

STRAIGHT

MALE PLUG STRAIGHT (parallel cord)

	Part Number	D +/-0.1		L+/-0.5	Wire Gauge
	SM1A	ø2.5		11	#22 #24
	SM2A	ø3.5		14	#22 #24

MALE PLUG STRAIGHT (parallel/coaxial cord)

	Part Number	D +/-0.1		L+/-0.5	Wire Gauge
	SM2B	ø3.5		14	#22 #24

FEMALE PLUG STRAIGHT (parallel cord)

	Part Number	D +/-0.1	d+/-0.1	L+/-0.5	Wire Gauge
	SF2A	ø3.5	ø1.3	7	#22 #24
	SF2B	ø3.5	ø1.3	9.5	#22 #24
	SF2C	ø3.5	ø1.3	11	#22 #24
	SF2D	ø3.5	ø1.3	14	#22 #24
	SF3A	ø5.0	ø2.1	9.5	#20
	SF3B	ø5.0	ø2.1	11	#20
	SF3C	ø5.0	ø2.1	14	#20
	SF5C	ø5.5	ø2.5	9.5	#18,#20
	SF5B	ø5.5	ø2.5	11	#18,#20
SF5A	ø5.5	ø2.5	14	#18,#20	
SF6A	ø6.5	ø3.0	9.5	#20	
SF6B	ø6.5	ø3.0	11	#20	

FEMALE PLUG STRAIGHT (parallel cord)

	Part Number	D +/-0.1	d+/-0.1	L+/-0.5	Wire Gauge
	SF3D	ø5.0	ø2.1	9.5	#22 #24
	SF3E	ø5.5	ø2.1	11	#22 #24
	SF5D	ø5.5	ø2.1	9.5	#22 #24
SF5E	ø5.5	ø2.5	11	#22 #24	

FEMALE PLUG STRAIGHT (parallel cord #20,#22,#24 /Coaxial #22)

	Part Number	D +/-0.1	d+/-0.1	L+/-0.5	Wire Gauge
	SF5F	ø5.5	ø2.1	9.5	#20,#22,#23
	SF5G	ø5.5	ø2.1	11	#20,#22,#23
	SF5H	ø5.5	ø2.5	9.5	#20,#22,#23
SF5I	ø5.5	ø2.5	11	#20,#22,#23	

FEMALE PLUG STRAIGHT (SPT-1#18 & XTW-A #20 Cord)

	Part Number	D +/-0.1	d+/-0.1	L+/-0.5	Wire Gauge
SF5J	ø5.5	ø2.1	12.5	#18,#20	

FEMALE PLUG STRAIGHT (parallel/coaxial cord)

	Part Number	D +/-0.1	d+/-0.1	L+/-0.5	Wire Gauge
	SF5K	ø5.5	ø2.1	9.5	#22 #24
	SF5L	ø5.5	ø2.1	11	#22 #24
	SF5M	ø5.5	ø2.1	14	#22 #24
SF5N	ø5.5	ø2.5	11	#22 #24	

MINI DIN MALE PLUG, STRAIGHT

	Part Number	Pin Configuration
	SMD3	
	SMD4	
	SMD5	
	SMS5	
	SMD6	
	SMD7	

RIGHT ANGLE

FEMALE PLUG RIGHT ANGLE (parallel cord)

	Part Number	D +/-0.1	d+/-0.1	L+/-0.5	Wire Gauge
	RF4A	ø5.03	ø1.57	8.2	#22 #24
	RF4B	ø5.03	ø1.57	13.5	#22 #24
	RF3A	ø5.0	ø2.1	9	#22 #24
	RF3B	ø5.0	ø2.1	11	#22 #24
	RF3C	ø5.0	ø2.5	11	#22 #24
	RF5A	ø5.5	ø1.3	11	#22 #24
	RF5B	ø5.5	ø2.1	9.5	#22 #24
	RF5C	ø5.5	ø2.5	9.5	#22 #24
	RF5D	ø5.5	ø2.1	11	#22 #24
RF5E	ø5.5	ø2.5	11	#22 #24	

FEMALE PLUG RIGHT ANGLE (parallel cord)

	Part Number	D +/-0.1	d+/-0.1	L+/-0.5	Wire Gauge
	RF2A	ø3.5	ø1.3	9	#22 #24
	RF2B	ø3.5	ø1.3	11	#22 #24
	RF5F	ø5.5	ø2.1	9.5	#22 #24
	RF5G	ø5.5	ø2.1	11	#22 #24
	RF5H	ø5.5	ø2.5	9.5	#22 #24
RF5I	ø5.5	ø2.5	11	#22 #24	

FEMALE PLUG RIGHT ANGLE (Coaxial cord)

	Part Number	D +/-0.1	d+/-0.1	L+/-0.5	Wire Gauge
	RF5J	ø5.5	ø2.1	9.5	#22 #24
	RF5K	ø5.5	ø2.1	11	#22 #24
	RF5L	ø5.5	ø2.5	9.5	#22 #24
RF5M	ø5.5	ø2.5	11	#22 #24	

MALE/FEMALE PLUG RIGHT ANGLE (Parallel cord)

	Part Number	D +/-0.1		L+/-0.5	Wire Gauge
RM2A	ø3.5		16.5	#22 #24	

MINI DIN MALE PLUG, RIGHT ANGLE

	Part Number	Pin Configuration
	RMD3	
	RMD4	
	RMD5	
	RMS5	
	RMD6	
	RMD7	

OUTPUT PLUG TABLE