

AC/DC Switching Open Frame

ELECTRICAL SPECIFICATIONS

- Input range : 90 ~ 264 VAC / 127 ~ 380 VDC
- Input Frequency : 47 - 440Hz
- Inrush Current (25°C) 20A @ 110VAC; 40A @ 220VAC MAX

OUTPUT

- Short Protection: Autorecovery
- Overload Protection: Automatic Power Limited
- Over Voltage Protection: Autorecovery
- Hold-up time : 16ms
- Outputs Can Be Modified From 3V~200VDC

ENVIRONMENTAL

- Operating Temperature -15 ~ 50°C, Ambient
- Operating Humidity 5 ~ 95% RH, No Condensing
- Storage Temperature -20 ~ 85°C, Ambient
- Vibration 2G, 10~500Hz, 3 axes

SAFETY STANDARDS

 CE Marking



DIMENSIONS : 130(L) x 70(W) x 31.6(H)mm

EMC STANDARDS

- EN 55022 CLASS B
- EN 61000-3-2 CLASS A
- EN 61000-3-3, EN 55024
- (IEC 61000-4-2, IEC 61000-4-3
- IEC 61000-4-4, IEC 61000-4-5
- IEC 61000-4-6, IEC 61000-4-8
- IEC 61000-4-11)

DC OUTPUT & FEATURES

MODEL	O/P Volt Adj. ±%	Load(Current) ¹			Ripple & Noise ⁴	Line REG. ²	Load REG. ³	Efficiency ⁵	O.V.P. Trip point
		Min.	Rated	Max.					
F150-09N	V1: +9V ±10%	0A	5.5A	5.5A	80mVp-p	±1%	±1%	72% Min.	12 ~ 15V
F150-12N	V1: +12V ±10%	0A	4.2A	4.2A	100mVp-p	±1%	±1%	74% Min.	15.0 ~ 18V
F150-15N	V1: +15V ±10%	0A	3.4A	3.4A	150mVp-p	±1%	±1%	75% Min.	20~ 24V
F150-24N	V1: +24V ±10%	0A	2.1A	2.1A	150mVp-p	±1%	±1%	76% Min.	27.6 ~ 31V
F150-201N	V1: +5V ±10%	0A	5A	5A	50mVp-p	±1%	±2%	73% Min.	5.8 ~ 7.0V -----
	V2: +12V-----	0A	2A	3A	100mVp-p	±1%	±5%		
F150-202N	V1: +5V ±10%	0A	3A	5A	50mVp-p	±1%	±1%	75% Min.	5.8 ~ 7.0V -----
	V2: +24V-----	0A	1.5A	2A	150mVp-p	±1%	±4%		
F150-301N	V1: +5V ±10%	0A	4A	5A	50mVp-p	±1%	±1%	73% Min.	5.8 ~ 7.0V -----
	V2: +12V-----	0A	2A	3A	100mVp-p	±2%	±5%		
	V3: -5V-----	0A	0.5A	1A	50mVp-p	±3%	±7%		
F150-302N	V1: +5V ±10%	0A	4A	5A	50mVp-p	±1%	±1%	74% Min.	5.8 ~ 7.0V -----
	V2: +12V-----	0A	2A	3A	100mVp-p	±2%	±5%		
	V3: -12V-----	0A	0.5A	1A	100mVp-p	±2%	±7%		
F150-303N	V1: +5V ±10%	0A	3A	5A	50mVp-p	±1%	±1%	74% Min.	5.8 ~ 7.0V -----
	V2: +12V-----	0A	1A	3A	100mVp-p	±2%	±5%		
	V3: +24V-----	0A	1A	1A	150mVp-p	±2%	±7%		
F150-304N	V1: +5V ±10%	0A	4A	5A	50mVp-p	±1%	±1%	74% Min.	5.8 ~ 7.0V -----
	V2: +15V-----	0A	1.5A	2A	150mVp-p	±2%	±5%		
	V3: -15V-----	0A	0.5A	1A	150mVp-p	±2%	±7%		

- NOTE:
1. Each output can provide up to maximum load, but total load can not exceed rated output power
 2. Line regulation is measured from low line to high line at rated load.
 3. Load regulation is measured from 20% to 100% of rated load at 110VAC input.
 4. Ripple & Noise is measured by using a 0.1uF/630V metalized capacitor & a 47uF electrolytic capacitor parallel on the test point, at rated load and 110VAC input.
 5. Efficiency is measured at rated load and 110VAC input.
 6. Hold-up time is measured at rated load and 110VAC input.



SMP TECHNOLOGY, INC.

227 Technology Circle, Scotts Valley, CA 95066


Tel : (831) 440-9191 Fax : (831) 427-7570

http : //www.smp-tech.com

E-Mail : sales@smp-tech.com

AC/DC Switching Open Frame

MECHANICAL SPECIFICATION

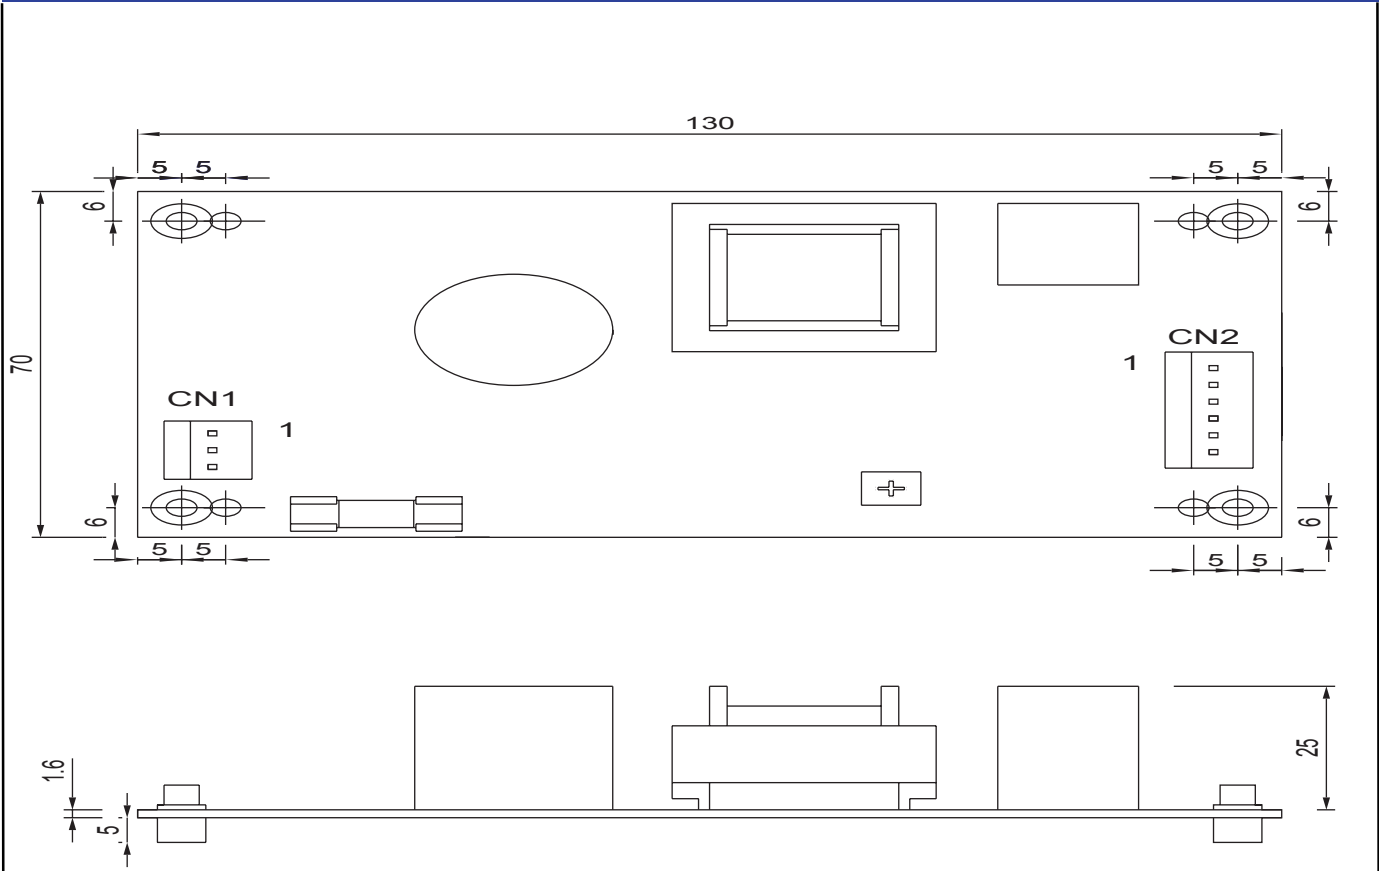

Input connector (CN1):
 3.96mm crimp style connector
 3Pin (Pin 2 no pole) · 3.96mm

Pin	Input	Description
1	N	Neutral Terminal of AC Input
3	L	Line Terminal of AC Input

No Polarity At DC Input

CASE NO: F150
UNIT: mm
DIMENSIONS:
 130(L) x 70(W) x 31.6(H)mm

DC Output Connector (CN2):
 3.96mm crimp style connector
 Single output: 2Pin · 3.96mm
 Dual output: 3Pin · 3.96mm

Pin	Single	Dual	Description
1	G	V2	G: DC Output Ground Terminal Vx: DC Output Terminal (Specify a ts pec.)
2	V1	G	
3	/	V1	

